

EASY-FORM™

ADHESIVE EXPANSION JOINT



Easy To Install, Self-Wound and Paperless – No Mess!

Simply position foam at the starting point, commence unrolling and apply pressure to ensure adhesion.


SEKISUI

FOAM
INTERNATIONAL
Global Foam Solutions

PHYSICALLY
CROSSLINKED
SEKISUI TECHNOLOGY

EASY-FORM™

ADHESIVE EXPANSION JOINT

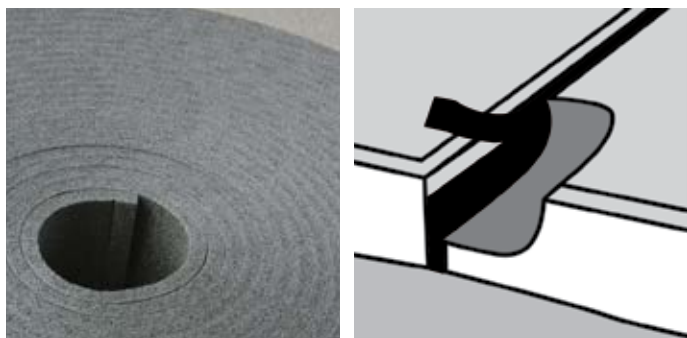

Benefits

- Cost savings: in material, time and the overall project
- Reduced labour time due to the ease of installation
- No mess to attend to! ("Paperless")
- Easy to store
- Easy to transport
- No release liner

Features

Continuous Rolls

A unique one piece extruded foam with no laminations or joins

Closed Cell

Non absorbent and impervious to most liquids

Crosslinked

Superior compression and recovery properties vital to ensure a good joint filler

Size Availability

Easy-Form is available in:

Roll Lengths: 10m and 25m rolls

Thickness: 10mm

Widths: 50mm, 75mm, 100mm, 125mm, 150mm, 200mm, 250mm and 300mm

Performance Data

Property	Typical Value	Test Method
Density	25 kg/m ³ (nominal)	Internal
Tensile Strength	3.3 kg/cm ² MD, 1.8kg/cm ² CD	JIS K6767
Elongation	240% MD, 140% CD	JIS K6767
Tear Strength	2.0 kg/cm MD, 1.3 kg/cm CD	JIS K6767
Hot Sealant Penetration	Zero	RTA T1154
Compression Strength	0.85 kg/cm ² @ 50% deflection	Internal
Extrusion During Compression	1.3 mm	ASTM D545
Recovery After Compression	100% after 10 minutes	ASTM D545
Water Absorption	0.09 mg/cm ²	JIS K6767
Water Vapour Permeability	8.2 x 10 ⁻¹⁴ kg/m/s/Pa	JIS Z0208

This information on Sekisui Foam Australia foams is presented to the best of our knowledge. All product data is based on average values and is for guidance only. As these products are subject to constant research and development, we reserve the right to update the contents without notice.

Recommendations as to methods of post fabrication, application and use of Sekisui Foam Australia foams are based on our experience and knowledge of the characteristics of our products and are given in good faith. As producer of the material we have no control over the application of Sekisui Foam Australia foams and no legal responsibility is accepted for such recommendations. In particular, no responsibility is accepted by us for any system in which Sekisui Foam Australia foams are utilised or for any application. Softlon and Thermobreak – Registered trademarks of Sekisui Chemical Co. or its subsidiaries.

© Sekisui Foam Australia Pty Ltd. Date of Publication: February 2015.

SEKISUI | **FOAM**
INTERNATIONAL
Global Foam Solutions



Sekisui Foam Australia

Head Office

1-5 Parraweena Rd, PO Box 2898,
Taren Point NSW 2229 Australia
Tel: +61 2 9525 9880
Fax: +61 2 9525 8004
Email: info@sekisuifoam.com.au
Web: www.sekisuifoam.com.au

Queensland Branch

15/853 Nudgee Rd, PO Box 448,
Northgate QLD 4013 Australia
Tel: +61 7 3267 7100
Fax: +61 7 3267 7166
Email: info@sekisuifoam.com.au
Web: www.sekisuifoam.com.au